

Godox 神牛

LED Video Light

LED摄影灯



神牛摄影器材有限公司

GODOX Photo Equipment Co., Ltd.

地址/Add: 深圳市宝安区福永镇福洲大道西新和村华发工业园A4栋
Building A4, Xinhe Huafa Industrial Zone, Fuzhou RD West, Fuyong
Town, Baoan District, Shenzhen 518103, China

电话/Tel: +86-755-29609320(8062) 传真/Fax: +86-755-25723423

邮箱/E-mail: godox@godox.com

<http://www.godox.com>

705-L260C0-00

Made In China



Instruction Manual | 说明手册
Chinese English Bilingual | 中英文双语

型号: LEDP260C

Foreword

Thank you for purchasing this Godox Product!

This **LEDP260C** video light (color temperature 3300K~5600K) is excellent for macrophotography, product shooting, photojournalistic and video recording, etc. The LED Light provides high brightness, a wide spectrum, soft light and accurate color temperature.

Features:


- 256-LED-bulbs panel is lithium-ion or DC powered
- Wireless 433MHz grouping system (6 groups & 16 channels)
- Wirelessly adjust brightness or color temperature
- Include a remote control, a detachable handle and AC adapter
- Large-sized LCD panel. Settings auto saved
- Fits almost any occasions

For your safety

- ⚠ Do not place in high temperature or high humidity conditions.
- ⚠ If this product overheats, it will cease operation and resume working after cooling down. This is due to the built-in overtemperature protection.
- ⚠ Do not handle with wet hands, immerse in water, or expose to rain.
- ⚠ Observe precautions when handling batteries:
 - Do not mix new and used batteries or batteries of different types.
 - Do not put batteries into a fire or apply direct heat to it.
 - Batteries are prone to leakage when fully discharged. To avoid damage to the product, be sure to remove batteries out when the product will not be used for a long time or when batteries run out of charge.
 - Should liquid from batteries come into contact with skin or clothing, rinse immediately with fresh water.

Parts

• Body

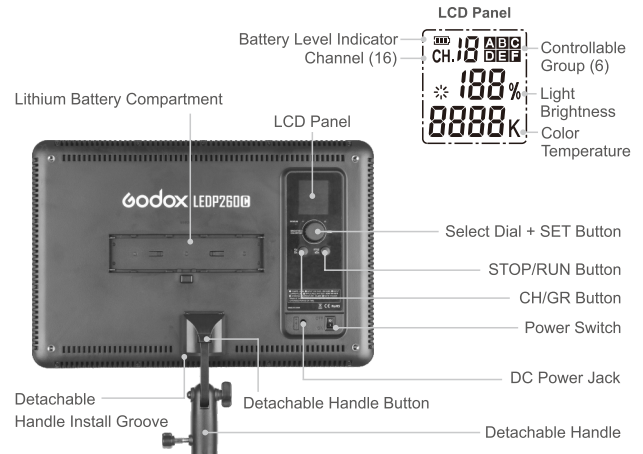

• Remote Control:




Power Management

1. Power Supply

Two power supply modes are available:



- **Using lithium battery:** Put two SONY NP-F970 model lithium batteries (purchased separately) into the battery compartment separately.



- **Using DC power jack:** This light can be powered by DC power supply. Use a 13~16.8V adapter (included) to connect the light with the DC power jack.

Note:

- When using lithium battery, the Battery Level Indicator is displayed on the LCD panel. When the indicator blinks, the lithium battery power is low. Please recharge it immediately before usage in order to avoid forceful auto off.

2. Installing Lithium Battery


- Turn the Power Switch off.
- Target the socket of the lithium battery towards the "+" "-" contacts of the Battery Compartment. Push the battery in until it locks.
- Power the light on.
- After using the light, please power it off.



Using the Video Light

1. By the Handle

- Install the Detachable Handle into the Handle Install Groove.



2. On the Light Stand

- Screw the Light Stand Locking Ring to the highest point and install the video light.
- Tighten the Light Stand Locking Ring.



Operation

1. Before Usage

- Insert the lithium battery or connect the light with the DC power supply.
- Switch the power on, the video light giving out light.
- Press the STOP/RUN Button to light up and shut down the LED lights.
- LCD panel shows the information.



2. Light Brightness/Color Temperature Adjustment

Adjusting Light Brightness

- Turn the select dial to adjust the light brightness.

Model	Temperature	Light Brightness Range
LEDP260C	3300K~5600K ±300K	10%~100%

Adjusting Color Temperature

- Press the SET button once and the color temperature icon blinks.
- Turn the select dial to adjust color temperature.

Model	Color temperature range
LEDP260C	3300K~5600K

3. Wireless Remote Control

- With 433 MHz wireless system, this product has remote grouping and control function. Up to 6 groups of LED light can be controlled. 16 channels are available with strong anti-interference capability.

Please set the channels and groups of LED video light to the same as those of remote control before usage.

LED Video Light



Remote Control



Adjusting Channel/Group of the LED Video Light

- Press the CH/GR button and the group icon blinks. Turn the select dial to choose a group ID (A to F).
- Press the CH/GR button twice and the channel icon blinks. Turn the select dial to choose a channel ID (1 to 16).

Adjusting Channel/Group of the Remote Control

- Press the CH/GRP button and the group icon blinks. Press the "+" "-" button to choose a group ID (A to F).
- Press the CH/GRP button twice and the channel icon blinks. Press the "+" "-" button to choose a channel ID (1 to 16).

Adjusting Light Brightness/Color Temperature with the Remote Control

- Press the "+" "-" button to adjust the light brightness.
- Press the SET button of the remote control once and the color temperature icon blinks. Press the "+" "-" button to adjust the color temperature.

Note: The wireless signal can be received only when the LED light is power on.

Other Operation Tips:

- Pressing the ON/OFF button on the remote control can only turn on/off all the LED groups instead of powering it on or off. When received the "OFF" command from the remote control, LED video light stop lighting up and LCD panel gets dark with "OFF" displayed. If this continues for four hours without any other operation, the LED video light will auto power off and the remote control will not work.
- Pressing the "SET" button on the remote control for 2 seconds can only turn on/off the current LED group instead of powering it on or off.
- The remote control will auto power off after four hours of idle operation.

Tips of Using Remote Control:

Please remove the battery if the light will not be used for an extended period of time.

What's in the Box of LEDP260C?

NO.	Included Item	LEDP260C (3300K~5600K)
1	LED Video Light	1PC
2	Remote Control	1PC
3	AC Adapter	1PC
4	Detachable Handle	1PC



LED Video Light



Remote Control



Detachable Handle



AC Adapter

Technical Data:

LED Video Light	Changeable Version LEDP260C
Lithium Battery	7.4V Lithium Battery (SONY NP-F970 model lithium battery)
DC Power Supply	13-16.8V
Power	Max. 30W
Color Temperature	3300K~5600K±300K
Channel	16
Group	6 groups (A, B, C, D, E, F)
Brightness (LUX)	2050 (0.5 m/4500K)
	2050 (0.5 m/3300K)
	2200 (0.5 m/5600K)
Color Rendering Index	>95
TLCI	≥94
Light Brightness Range	3300K~5600K: 10%~100%
LED Beads Quantity	5600K: 128
	3300K: 128
Operation Temperature	-10~40°C
Dimension	360mm*240mm*27mm
Net Weight	917g

Remote Control	RC-A5
Power Supply	3.0V (AAA*2) (not include)
Wireless Frequency	433MHz
Distance(emptyness)	20m
Channel	16
Group	6 groups(A, B, C, D, E, F)
Standby Time	Over one year
Operation Temperature	-10~50°C
Dimension	120mm*38mm*15mm
Net weight	30g

* Product design and specifications are subject to change without notice.