

Secure Connection Limited
Flat H, 11th Floor, Tower G,
Grand Water Front, 38 San Ma
Tau Street, To Kwa Wan, KL,
Hong Kong

Customer Care Email:
support@honeywellconnection.com
Tel: +852 5803 1828
Web: www.honeywellconnection.com

The Honeywell trademark is used
under license from Honeywell
International Inc. Honeywell
International Inc. makes no
representations or warranties with
respect to this product. This product
is manufactured by Secure
Connection Limited, Hong Kong.

All trade names are registered
trademarks of respective
manufacturers listed. ©2024 Secure
Connection Limited, Hong Kong. All
rights reserved.

Honeywell

Honeywell

BLUETOOTH SPEAKER

Owner's manual

Please read the manual carefully before use



Suono P400
Bluetooth Speaker
Platinum Series

HC000117/AUD/BTS/P400/BLK

www.honeywellconnection.com
info@honeywellconnection.com

Dear Customer,

Thank you for purchasing Honeywell Suono P400 Bluetooth Speaker. In order to facilitate the installation and use of this Multifunctional Bluetooth Speaker, we recommend that you carefully read this manual, and keep it stored safely. To ensure that you always enjoy quality sound, please use this manual for proper use and maintenance of your product.

If any questions arise during use, please consult this manual. If it is in accordance with the warranty, we kindly welcome you to contact us at:

support@honeywellconnection.com

We welcome any comments or suggestions you may have about our products and service.

Contents

| | |
|-------------------------------------|----|
| 1. What's in the Box | 01 |
| 2. Performance Index | 01 |
| 3. Product Appearance and Structure | 02 |
| 4. Function Description | 02 |
| 5. How to Operate | 03 |
| 5.1. Charging | 03 |
| 5.2. Powering on | 03 |
| 5.3. Pairing via Bluetooth | 03 |
| 5.4. MicroSD Card Operation | 04 |
| 5.5. AUX Cable Operation | 04 |
| 5.6. USB Function | 04 |
| 5.7. Dual Speaker Pairing | 04 |
| 5.8. RGB Mode | 04 |
| 6. Precautions for Use | 05 |
| 7. Troubleshooting | 05 |

What's in the Box


1. Suono P400 Bluetooth Speaker: 1 Unit
2. USB A to Type C Cable: 1 Unit
3. Aux Cable: 1 Unit
4. User Manual: 1 Unit
5. Warranty Card: 1 Unit
6. Thank You Card: 1 Unit

Performance Index

| Product Name | Suono P400 Bluetooth Speaker |
|------------------------------------|-------------------------------|
| Audio Interface | Bluetooth, USB, Micro SD, AUX |
| Charging Interface | Type C |
| Output Power | 15W |
| Rated Voltage | 7.4V |
| Bluetooth Version | V5.3+BR+EDR+BLE |
| Bluetooth Range | 15 meters |
| Battery Type and Capacity | Lithium-ion, 2400mAh |
| Charging Time | 3 hours |
| Playback Time | Up to 10 hours |
| IP Rating ¹ | IPX6 |
| Driver Size ² | 78mm |
| Frequency Range | 20Hz-20KHz |
| Signal To Noise Ratio ³ | ≥72dB |
| Impedance ⁴ | 4 Ohms |
| Product Dimension | 170*105*100mm |
| Product Weight | 715g |

1. The IP rating determines how resistant something is to environmental elements. Most IP numbers read IPXX, each 'X' being a placeholder for a number. The first number represents the level of resistance to dust/particles and the second representing its ability to withstand liquid.
2. Sound quality depends to a great extent on the size of the diaphragm, which is indicated by the driver diameter: the larger the diameter, the better the sound quality.
3. Signal to Noise Ratio is defined as the ratio of signal power to the noise power. It is represented in decibels.
4. Impedance refers to the load a speaker places on an amplifier. Technically, impedance is the 'resistance' a speaker offers to the current supplied by an amplifier because the output current of an amplifier is AC (not DC, like from a battery), this resistance is called impedance.

Product Appearance And Structure

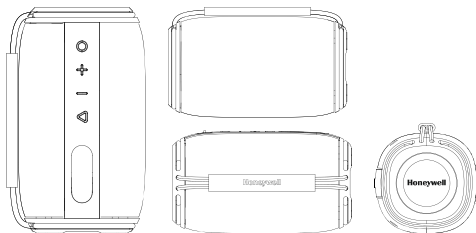

Function Description

| Function | What to do |
|----------|---|
| ○ | Long press: Power on/off the device |
| | Short press: Switch RGB Lights |
| △ | Double press: Switch between Bluetooth, Aux, MicroSD card and USB input mode |
| | Short press: Play/pause (While playing music) |
| | Short press: Answer an incoming call |
| | Short press: End the ongoing call |
| | Double press: Call latest incoming/outgoing call |
| - | Double press: Enable dual speaker pairing mode (When in Bluetooth pairing mode) |
| | Long Press: RGB Mode on/off |
| + | Short press: Decrease the volume |
| | Long press: Skip to previous track |
| + | Short press: Increase the volume |
| | Long press: Skip to next track |

Function Description (Continued)

| Indicator Light Status | Mode |
|------------------------------|--|
| Solid blue light | Power on/Music paused/Bluetooth device connected |
| Blue light off | Power off |
| Rapid flashing blue light | Pairing mode |
| Slow flashing blue light | Playing music/during call |
| Alternate red and blue light | Charging (When speaker is powered on) |
| No Light | Low battery |
| Solid red light | Charging (When speaker is powered on/off) |
| Solid green light* | Fully charged |

*While connected to charging cable

How to Operate

Before Powering ON for the first time, please charge fully for good battery life.

Charging

1. Plug the small end of the Type C cable into the Type C connector port on the speaker.
2. Plug the other end into a USB wall charger/computer/power bank that is powered on.

Powering On

Long press the ○ button to power on/off the device.

Pairing Via Bluetooth

Connecting any Bluetooth device

1. When the speaker is turned on, it automatically enters bluetooth pairing mode.
2. Open the Bluetooth settings on any Bluetooth device and search for device with name "Suono P400" and connect.

Note:

1. "Suono P400 Bluetooth Speaker" will automatically re-pair with the last paired device whenever it is within range.
2. Devices with older Bluetooth versions may prompt you to input a passcode key. Please enter "0000" on your device and press OK to successfully connect with "Suono P400 Bluetooth Speaker".

MicroSD Card Operation

When a microSD card is inserted, the audio/music stored in the microSD card will automatically start playing.

Note:

1. Supports MP3 and WAV audio formats only.
2. The speaker also has a memory function that will recall and continue from the last-played track whenever a microSD Card is reinserted into the speaker.

Aux Cable Operation

Insert the 3.5mm AUX cable into the AUX input. "Suono P400 Bluetooth Speaker" is ready to play audio/music through AUX mode.

USB Function

When a USB Flash drive is inserted, the audio/music stored in the USB Flash drive will automatically start playing.

Note:

1. Speaker is compatible with USB Flash Drives upto 64GB in size and supports MP3 and WAV audio formats only.
2. The speaker also has a memory function that will recall and continue from the last-played track whenever a USB Flash drive is reinserted into the speaker.

Dual Speaker Pairing

1. Power on both the Speakers.
2. While both the speakers are in Bluetooth pairing mode, double press the **Q** button on 1 speaker to pair the speakers together.
3. Connect the speaker to a Bluetooth device. Now you can play music on both the speakers at the same time from a single Bluetooth device.
4. Power off any 1 speaker to disable dual speaker pairing mode.

Note:

Performance may vary based on a mobile device, distance, and environmental factors.

RGB Mode

When a speaker is powered on it automatically enters RGB Mode.

Note:

1. Short press the **Q** button to switch the RGB Lights.
2. Long press the **Q** button to on/off RGB Mode.

Precautions For Use

- Do NOT use at high volume for any extended period to avoid hearing damage.
- Do NOT use while driving for phone calls or any other purpose.
- Do NOT use if there is any loud unusual noise. If this happens, please contact us at support@honeywellconnection.com.
- This product contains small parts which may be a choking hazard. Not suitable for children under the age of 3.
- This product contains magnetic material. Consult your physician before using the product in case you have a medical implant of any type.
- Do NOT attempt to disassemble this product as this may lead to a hazard and will void the warranty.
- Use this product only with the power supply provided along with this product (applicable for selected models only).
- Do NOT use this product near any form of excessive heat such as gas appliances and heating appliances.

Troubleshooting

| Problem | Solution |
|-------------------------------------|--|
| No Power | <ul style="list-style-type: none">• Charge the battery.• Connect to the power source. |
| Unsuccessful Bluetooth pairing | <ul style="list-style-type: none">• Restart the product and try pairing again.• Disable Bluetooth mode in your device and then re-enable it. |
| Poor audio quality | <ul style="list-style-type: none">• Make sure the product is in the Bluetooth range. |
| Low or no volume | <ul style="list-style-type: none">• Increase the volume on "Suono P400 Bluetooth Speaker" and/or connected device. |
| Undiscoverable in Bluetooth pairing | <ul style="list-style-type: none">• The product may be paired to a different device, disconnect from the paired device.• "Suono P400 Bluetooth Speaker" is not in Bluetooth mode, change to Bluetooth mode. |